


1 STOP5E® 5E I 5STOP SMSTEEA



2 Preheat the cartridges to a temperature of 30 ° C.



3 Clean the recess well with a brush and scouring pad and rinse with water if necessary. STOP5E® 5Euastop adheres to dry and wet surfaces. Coat the opening and cables with STOP5E® 5Euastop for good adhesion.

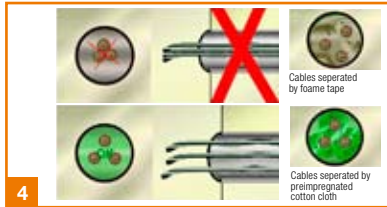

4 Apply a suitable barrier material foam tape or cotton cloth. When several cables are fed through, they must be separated from each other by the barrier material for better application



5 7KEDUULUPVWESODFGDSSURPPGS LQWKJFW




6 LIWKFDEQWOLKWODQGDSSOWK67234 TDWWRSLWKDKDQGGQVWKLEO QROWRILOODSSURPPRIWKJFVWLKRWDLU LQFOWLQVJLQOWKJFVWURPWKEDFWRWKIURQW



7 JLOOWKRSQLQWK67234TDWWRSSWRDSSURPPRIURPWKJURQW7K UPDLQLQVSDFLVILQOGLWKPRUWDU



8 JRUULUWUDUGDQWDSOLFDFWLRQWV67234 ORUWDUJ5JRUJSSOLFDFWLRQVQLQWQYLURQPQWV DWUEDLVQV67234ORUWDU:5

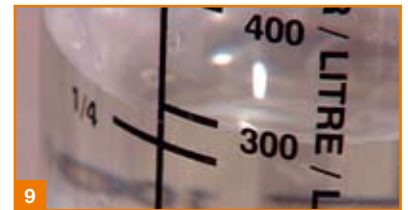

9 ODQWKUPDLQLQPPRIWKJFVWEIRU DSSQLQWKPRUWDUJLWKPRUWDLWKDWU WRDPDODEOPDVV



10 7KPRUWDLVRSUOPLGKQDILUP PDQDEQEDQEPDGLWKRWIDQOLQ DSDUW



11 SSOWKPRUWDLURPFRWWRPWRWRSQWK UPDLQLQPPRIWKRSOLQ



12 6PRWKWKPRUWDLWKDSWWQLI DQGDOLWQDWU

Paste suitable for sealing underground pipe and cable penetrations and hollow spaces against penetration of gas, moisture, stagnant water and groundwater leaks.

PROPERTIES

- 0LLPDOXUIDHSUHSUDUDLR
- GKHLRRGUDGHXUIDH
- DDGHDDSSOLDLR
- HLDURRXGDHUSUHUXHSR EDU
- DDGDHUJHLD
- 1RRLXHUDGHLURPHDOOIULHGO
- OLPLHGKHOIOLIH

BENEFITS

- KHHDOUHPDLIOHLEOH
- 1RSHLDORROUHTXLUHG
- 1RORRIPDHULDOSDHLUHDXDEOH
- DHDOLRXULUHTXLUHG
- 3HUPDHDGRSLPDODIH
- PDOOKLILSLSHDGDQDEOHDERUEHGEKH HP
- ,DOODLRRIDGGLLRDOSLSHDGDQDEOHSRLEOH



EUCCHEM
PASSION FOR CONSTRUCTION & CHEMISTRY

WWW.EUCCHEM.COM

